BRIGHTMOOR / SOLAR

# Make room for daylight.



## 6 kWp

VERIFIED EXAMPLE CAPACITY
12 panels x 500 Wp
Illustrative system, not installed fleet.

# Solar, made understandable.

Brightmoor is a fictional residential solar studio built around one promise: a proposal you can understand.

We connect the roof survey, energy model and handover documents so each decision has a clear reason.

A good conversation starts with the home: its roof, daytime electricity use and the owner's priorities.

If the site is unsuitable, the recommendation should say so before a system is sold.



Industry reference / Bill Mead, Unsplash. No staff or completed-project claim.

# Know your numbers.

**12**



panels / 500 Wp each

**6**

kWp / rated DC capacity

**6,600**

kWh / modelled year 1 output

Capacity: power at standard test conditions. Generation: energy over time. Model yield: 1,100 kWh per kWp per year; not a site forecast.

# A clear route from roof to ready.

Each stage ends with something the owner can review. We do not treat a roof photograph as a completed survey.

1

## Discover

Your roof and usage brief

2

## Design

A priced, scoped proposal

3

## Install

A documented installation

4

## Handover


Tests, records and monitoring

# Four steps.
# Four decisions.

| | |
|---|---|
| 01 / DISCOVER | Review roof condition, access, shade and twelve months of bills. Confirm who owns each approval. |
| 02 / DESIGN | Compare panel layout, estimated output and load timing. Show exclusions, allowances and export assumptions. |
| 03 / INSTALL | Agree access and safety planning. Record mounting, cable routes and installed equipment before concealment. |
| 04 / HANDOVER | Complete recorded electrical checks. Explain isolation, monitoring, warranty terms and the service route. |

Decision gates: suitability / proposal / readiness / acceptance.

# Choose what your home needs.



## Rooftop solar

Panel layout and system scope matched to the roof survey.



## Energy modelling

A transparent forecast with losses and usage assumptions.



## Battery options

A separate storage comparison; never assumed essential.



## Monitoring

Visibility of generation and faults after handover.

Grid connection, structural review and permissions depend on the site.

# Support beyond switch-on.



Industry reference / Los Muertos Crew, Pexels.

## A usable handover

Keep the equipment schedule, test record, isolation diagram and warranty documents together. Ask who responds to a fault and how.

## A defined service

Agree monitoring responsibilities, inspection intervals and any paid maintenance separately. Response times require a written service agreement.

# One roof.
# An open model.


WORKED EXAMPLE / FICTIONAL HOME
No battery. All figures describe one illustrative year.

| | |
|---|---|
| Installed DC capacity | 12 x 500 Wp = 6 kWp |
| Assumed specific yield | 1,100 kWh/kWp/year |
| Annual generation | 6 x 1,100 = 6,600 kWh |
| Used in the home / 60% | 3,960 kWh/year |
| Exported / 40% | 2,640 kWh/year |
| Import tariff assumption | GBP 0.30/kWh |
| Export payment assumption | GBP 0.05/kWh |

Yield is a single annual assumption, including system losses. No location, shade, roof direction or seasonal forecast is claimed. Tariffs are hypothetical, not current market offers.

# Follow the annual savings.

GBP / year 1 / hypothetical tariffs
Bar lengths share a zero baseline and GBP 1,500 scale.

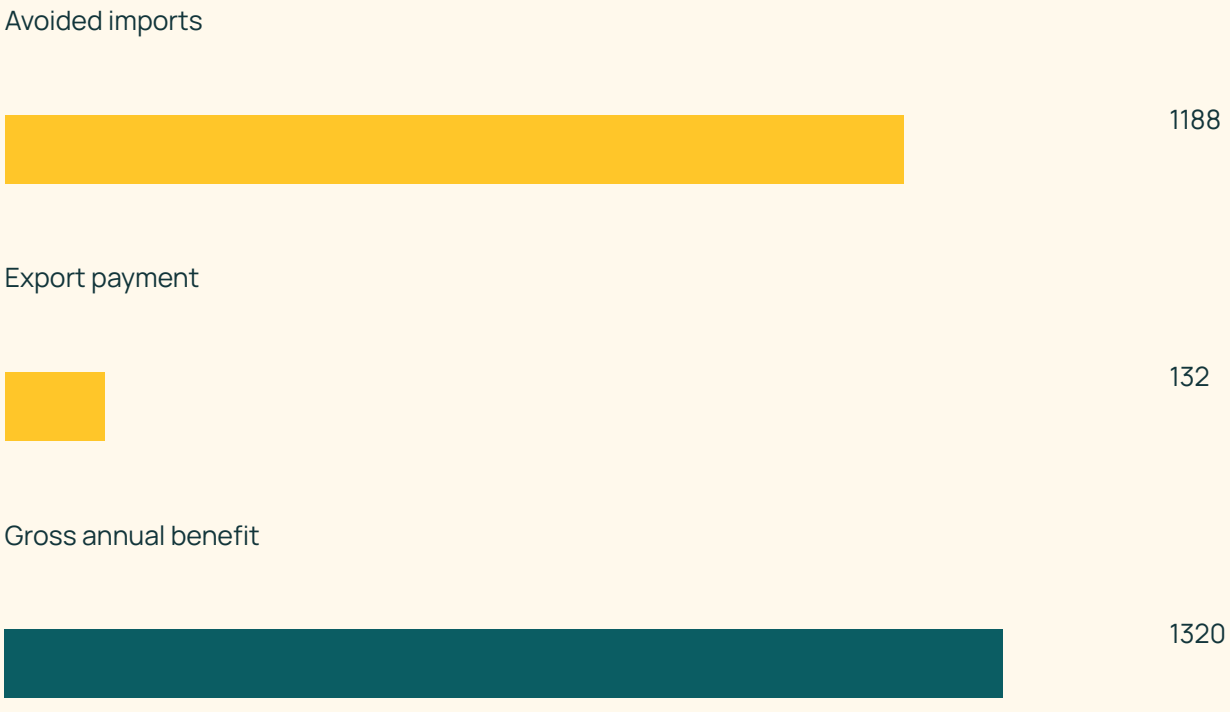


3,960 x 0.30 = GBP 1,188
2,640 x 0.05 = GBP 132
GBP 1,188 + GBP 132 = GBP 1,320/year gross

Not net profit or payback: capital cost, finance, maintenance, degradation, tax and future tariff changes are excluded.

# Quality is a process.

## Before acceptance

Confirm the installed equipment matches the schedule. Retain test results and photographs. Check labels and the isolation route. Demonstrate monitoring and explain limitations.

These are proposed procedures, not accreditation claims.

## Questions to ask

Will panels power a home in a cut?
Not necessarily. Backup needs an explicitly designed system.

Do I need a battery?
Compare your load timing and storage costs separately.

Is output guaranteed?
A model is an estimate. Any performance promise must be written in the contract.

Evidence before claims.
No invented certification badges, testimonials or installed-project totals.

# Start with a better brief.


Use this checklist when requesting a proposal. Contact details must be supplied by the brand owner before publication.

- [ ] Property address and roof ownership
- [ ] Roof age, condition and access
- [ ] Twelve months of bills / annual kWh
- [ ] Daytime occupancy and large loads
- [ ] Battery or backup priorities
- [ ] Budget range and preferred timing

Static planning checklist. No submission link or invented contact address.

# Daylight.
# With a clear plan.

BRIGHTMOOR SOLAR
Fictional company profile / portfolio concept
Design and native production: Ayobami

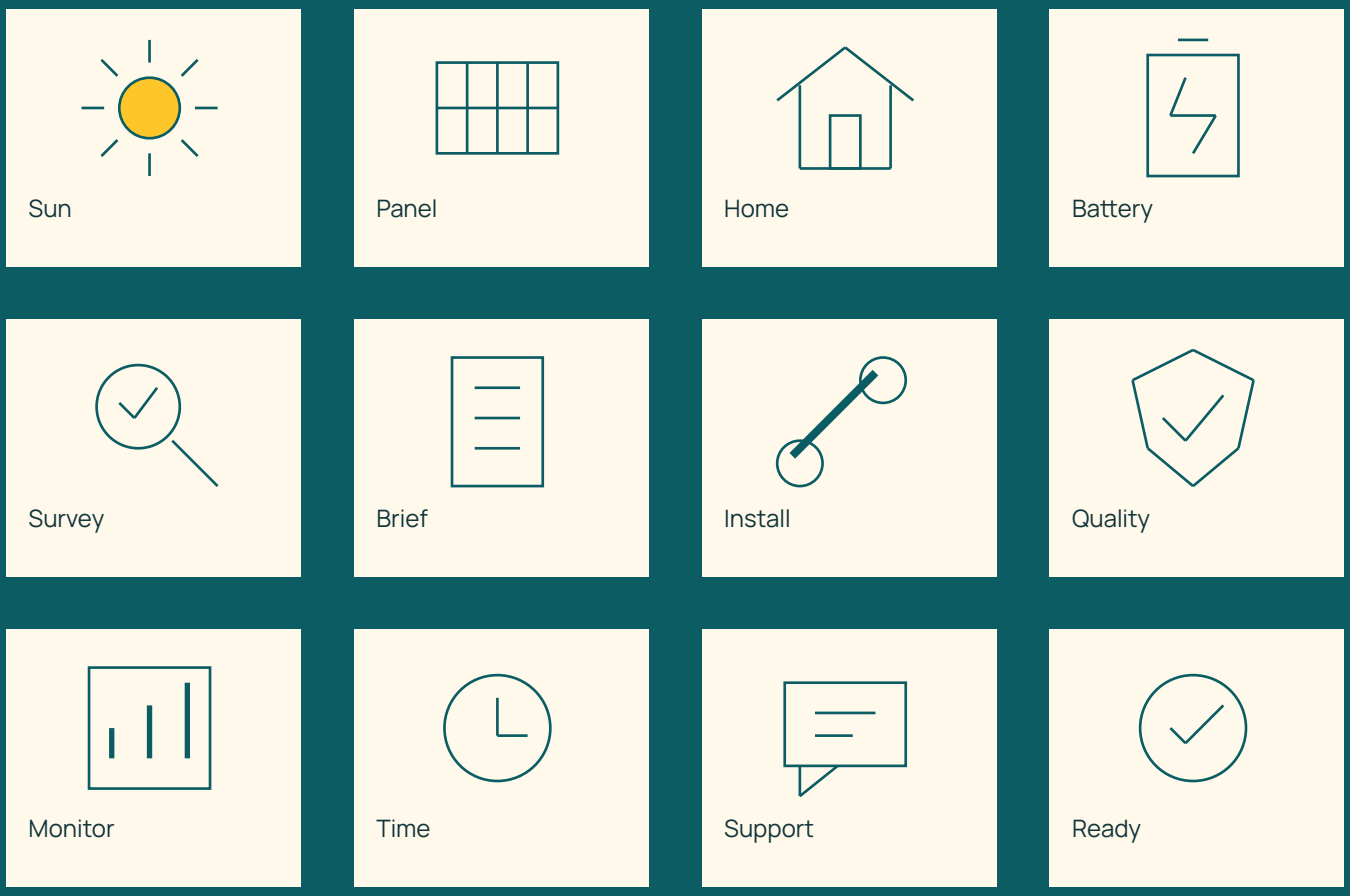


Photography: Soren H / Bill Mead / Los Muertos Crew.
Illustrative images do not depict Brightmoor staff or commissions.